



TEST REPORT

Report No.: SCB0115/2021
Page: 1 of 5
Date: Jan 15th, 2021

SHENG CHANG TECH CO., LTD

**LOT I-1A-CN, MY PHUOC 2 IP, MY PHUOC WARD, BEN CAT
TOWN, BINH DUONG PROVINCE**

The following merchandise was submitted and identified by the vendor as:

Product Description: Lead acid battery
Style/ Item No.: SP 18-12
Manufacturer/ Vendor: SHENG CHANG TECH CO., LTD.
Country of Origin: Vietnam
Quantity: Total 1 pieces
Testing Period: Jan 03rd, 2021 to Jan 14th, 2021

We have tested the submitted sample(s) as requested and the following results were obtained:

Test Required : Special Provision 238 in International Maritime Dangerous Goods Code 2018
Edition.(Amdt 39-18)

Conclusion
Submittals samples comply with the requirement of Special Provision 238 in International Maritime Dangerous Goods Code 2018 Edition. (Amdt 39-18)

**Signed for and on behalf of
Sheng Chang Tech Co., Ltd**

Tsun Fu Chang

Tsun Fu Chang

Lab Environmental Conditions:

Ambient temperature: $(20 \pm 5) ^\circ\text{C}$


Ambient humidity: $(55 \pm 20) \% \text{RH}$

Test Location:

Lot I-1A-CN, My Phuoc 2 IP, My Phuoc ward, Binh Duong Province
820000, Vietnam.

Name	Brand	Model	Serial No.
Vibration Test System	King Design	EM-800F2K-50N120	RU104080389
Controller	Dactron	COMET 200	10539718
Control Accelerometer	WR	793-6	A4938
Vacuum-Temperature Cabinet	YEONG SHIN	DOBL-45	YSCB940280E
Programmable Temperature & Humidity Chamber	KSON	THS-A6T-150	5030K

Images:

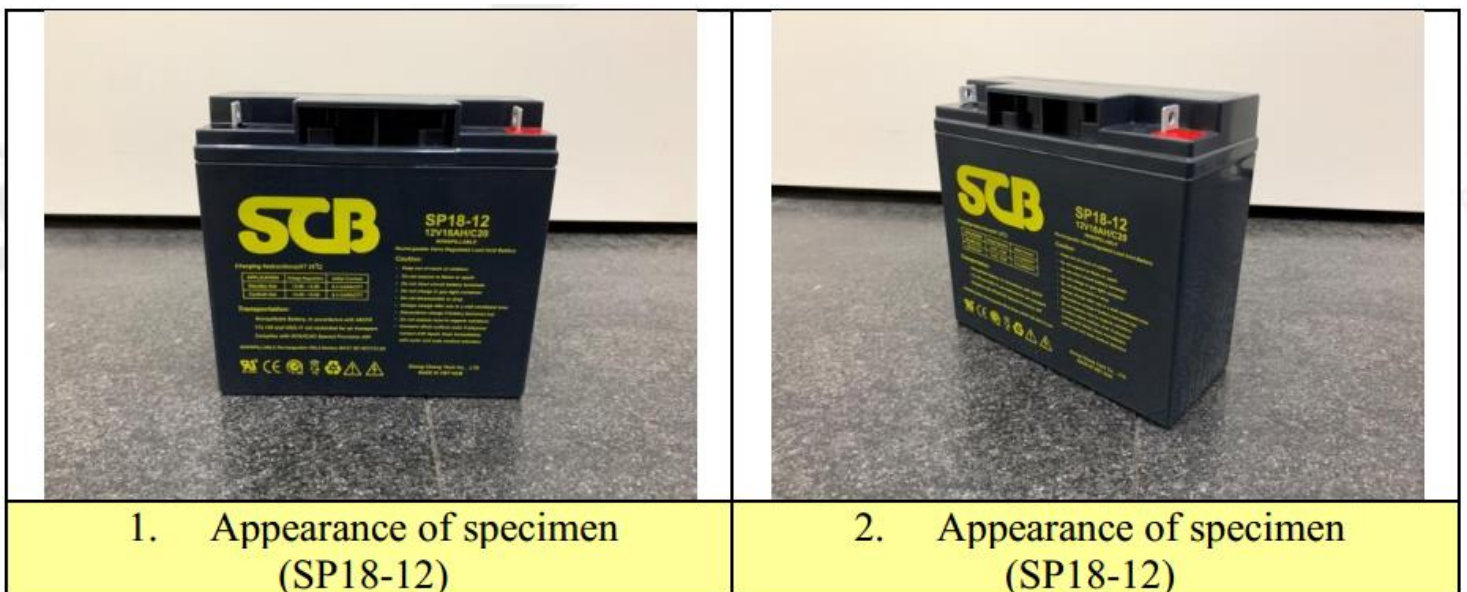

Images--Continued:



Test Method/ Specification:

Special Provisions 238	
Test method:	<p>1. Batteries can be considered as non-spillable provided that they are capable of withstanding the vibration and pressure differential tests given without leakage of battery fluid:</p> <p>Vibration test: The battery is rigidly clamped to the platform of a vibration machine and a simple harmonic motion having an amplitude of 0.8 mm (1.6 mm maximum total excursion) is applied. The frequency is varied at the rate of 1 Hz/min between the limits of 10 Hz to 55 Hz. The entire range of frequencies and return is traversed in 95 ± 5 minutes for each mounting position (direction of vibrator) of the battery. The battery is tested in three mutually perpendicular positions (to include testing with fill openings and vents, if any, in an inverted position) for equal time periods.</p> <p>Pressure differential test: Following the vibration test, the battery is stored for six hours at $24^{\circ}\text{C} \pm 4^{\circ}\text{C}$ while subjected to pressure differential of at least 88 kPa. The battery is tested in three mutually perpendicular positions (to include testing with fill openings and vents, if any, in an inverted position) for at least six hours in each position.</p> <p>Non-spillable type batteries which are an integral part of and necessary for the operation of mechanical or electronic equipment shall be securely fastened in the battery holder on the equipment and protected in such a manner as to prevent damage and short circuits.</p> <p>2. Non-spillable batteries are not subject to the provisions of this Code if, at a temperature of 55°C, the electrolyte will not flow from a ruptured or cracked case and there is no free liquid to flow and if, when packaged for transport, the terminals are protected from short circuit.</p>
Requirement:	No leakage of battery fluid



TEST REPORT

Report No.: SCB0115/2021

Page: 5 of 5

Test Result:

1. Vibration Test:

Check Item Style/Item No.	Appearance check (Visual check)
SP18-12	No leakage of battery fluid

2. Pressure Different Test:

Check Item Style/Item No.	Appearance check (Visual check)
SP18-12	No leakage of battery fluid

3. High Temperature Test:

Check Item Style/Item No.	Appearance check (Visual check)
SP18-12	No leakage of battery fluid

Test Item	Test Result	Note
Special Provision 238	Pass	-

— — — The End of Test Report — — —